

P215 PRO-CO 21.5" PORTABLE PROTECTIVE MONITOR

Thinner, Lighter, Brighter



New
Protective Case



1920X1080



1000nits



3G-SDI



HDMI 2.0




16 Channel
Audio Meter



Tally
Indicator

>> NEW PORTABLE PROTECTIVE CASE



Butterfly Lock



Protective Corner



3/8" & 1/4" Screw Thread

>> FEATURES

- Full HD panel, viewing details with confidence
- High bright 1000nit, visible in sunlight
- Portable protective case, easy to handle various tasks
- Intuitive buttons operation, 4 custom function short-cut buttons to improve work efficient
- HDMI Input and Output support 4K@60
- Under HDMI signal the audio meter level can be display max 8 channels; under SDI signal can be display max.16 channels
- HDR monitoring, what you see is what you get
- Custom 3D-LUT, preview film look
- With Waveform, Histogram, Focus Assist, Monochrome etc. functions, help you accurately exposure and focus every shot
- The protective case with multiple 3/8", 1/4" screw thread to install video transmission or other devices
- Built-in dual speakers
- 3-color Tally light, enhance team cooperation

>> FULL RANGE OF AUXILIARY FUNCTIONS



3D LUT



HDR



Waveform



Vector Scope




Histogram



Peaking Filter



Embedded Audio



Screen Marker



Center Marker



Ratio Marker



Overscan



Exposure



Check Field



False Colors




Nine Grid




Time Code



Image Flip



Pixel-to-Pixel



Anamorphic Mode



Aspect Ratio



Image Freeze



Zoom-in

>> MULTIPLE POWER SUPPLY MODES



XLR Connector


DC IN

V-mount Battery Plate

>> PARAMETER

Description	21.5" Hight Bright Portable Carry-on Monitor
Model	P215 PRO-CO
Screen size	21.5" IPS
Resolution	1920×1080 pixels
Display Colors	16.7M colors 8bit (6-bit + A-FRC)
Gamut	72% NTSC
Pixel pitch	0.08265(H) X 0.24795 (V) mm
Aspect Ratio	16:9
Brightness	1000 cd/m ²
Contrast	1000:1
Backlight	LED
Response Time	Tr + Tf=25ms
Viewing Angle	89°/89°(L/R) 89°/89°(U/D)
Inputs	2*3G-SDI, 2*HDMI2.0, DVI, Tally, USB
Outputs	2*3G-SDI, 1*HDMI2.0
Audio	3.5mm Stereo Headphone, Speaker
SDI Support Format	720p (60/59.94/50/30/29/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
HDMI 2.0 Support Format	720p (60/59.94/50/30/29/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K 3840×2160p (60/50/30/29.97/25/24/23.98Hz)
	4096×2160p (60/50/30/29.97/25/24/23.98Hz)
Input Voltage	DC 10-24V
Power Consumption	≤44W
Working Temperature	0°C~50°C
Storage Temperature	-20°C~60°C
Unit Size	553.5L×394.5H×115Dmm (with protectvie case)
Unit Weight	9.25KG (with protectvie case)

>> STRUCTURE

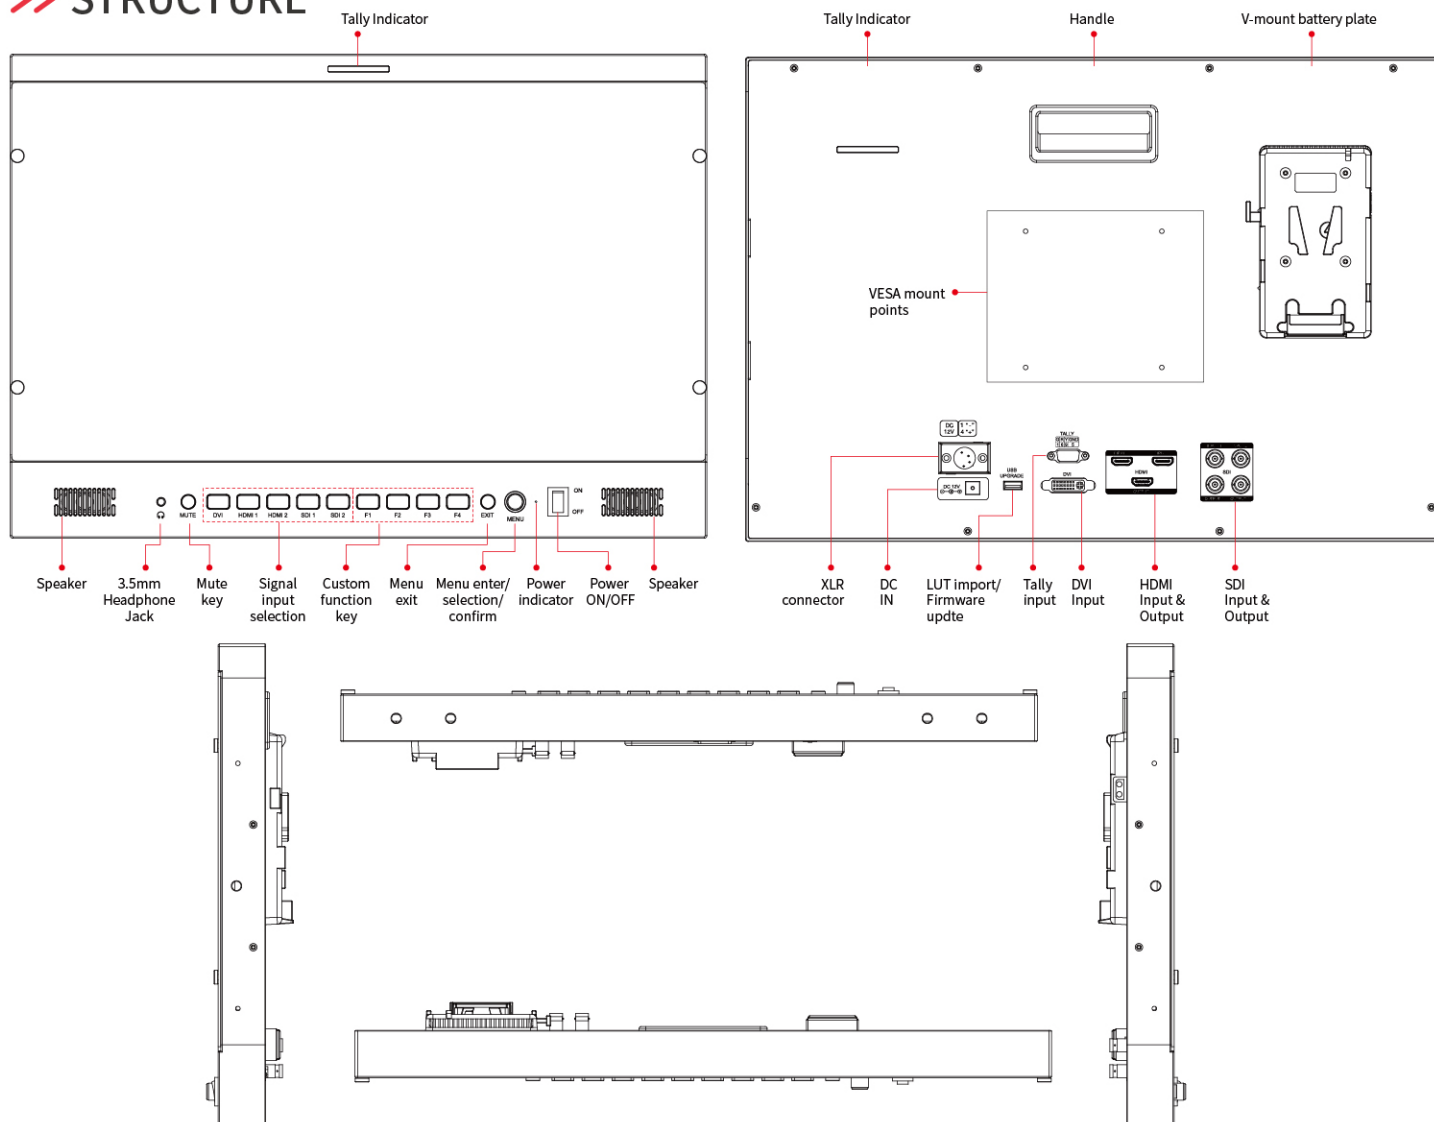

>> PACKING LIST

			
Monitor	Power Adapter	Tally Kit	V-mount Battery Plate (default to mount on device)
			
Mini HDMI Cable	HDMI Cable	SDI Cable	Manual

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE FC



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@seetec.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn